

WTL-03 WTL-04
WOLTA®

WTL-03B

180°
угол
поворота

WTL-04B

180°
угол
поворота



Ra ≥ 80



≤ 5%



IP40



4



+1..+45°



30 000



II



~220-240



2

WTL 03B/WTL 04B


| WTL-20W/03B | 20 | 1600 | 80 | 4000 | 120 | 330 33 60 |
|-------------|----|------|----|------|-----|-----------|
| WTL-30W/03B | 30 | 2400 | 80 | 4000 | 120 | 465 33 60 |
| WTL-20W/04B | 20 | 1800 | 90 | 4000 | 60 | 330 33 60 |
| WTL-30W/04B | 30 | 2700 | 90 | 4000 | 60 | 465 33 60 |




SMD

WTL-03 COB

WTL-04.



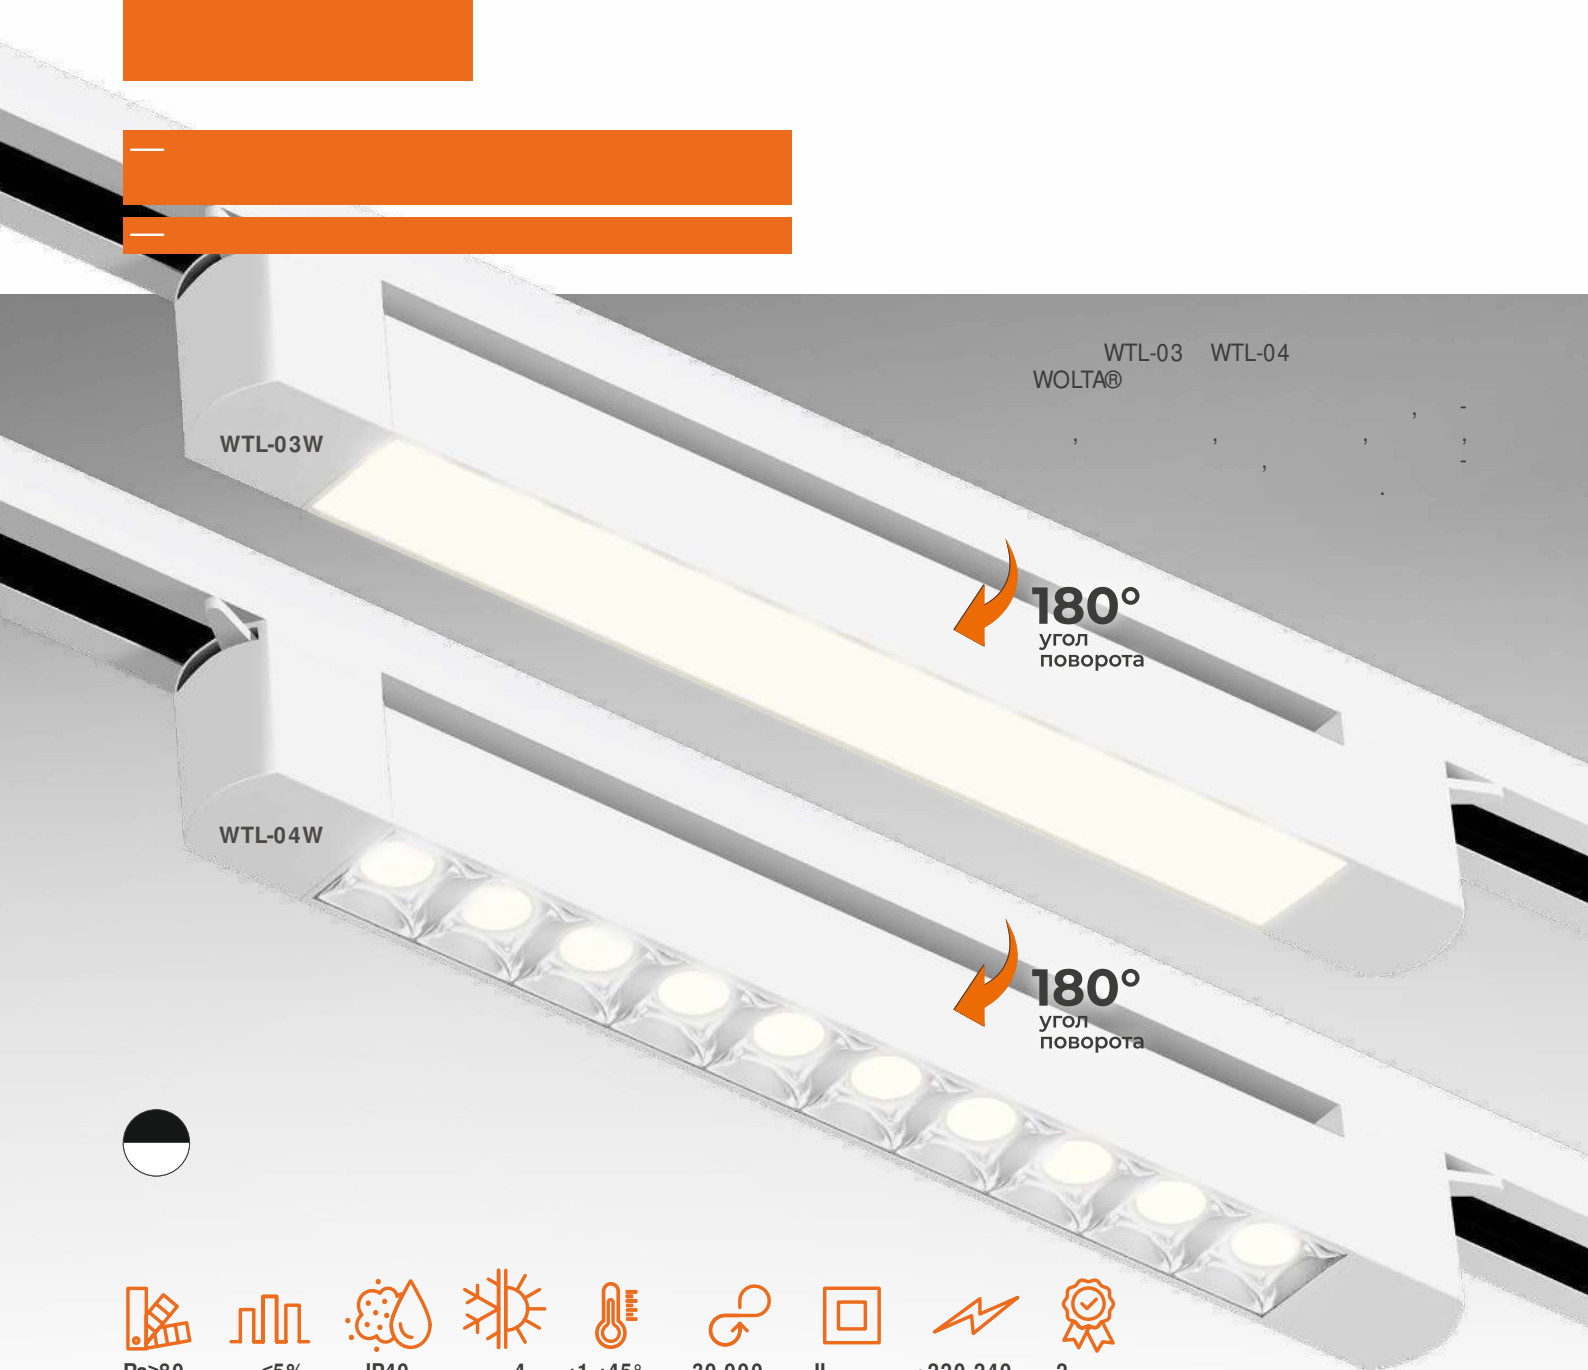

- Ra≥80
- ≤5%
- IP40
- 4
- +1..+45°
- 30 000
- II
- ~220-240
- 2

WTL 03W/WTL 04W

| | WTL-20W/03W | WTL-30W/03W | WTL-20W/04W | WTL-30W/04W |
|---------------|-------------|-------------|-------------|-------------|
| Height | 20 | 30 | 20 | 30 |
| Length | 1600 | 2400 | 1800 | 2700 |
| Width | 80 | 80 | 90 | 90 |
| Power | 4000 | 4000 | 4000 | 4000 |
| Height (chip) | 120 | 120 | 60 | 60 |
| Width (chip) | 330 | 465 | 330 | 465 |
| Depth (chip) | 33 | 33 | 33 | 33 |



- SMD
- WTL-03 COB
- WTL-04.

